


B AC Motors

Reversible Motor 60W(□90mm)

Dimensions


MOTOR ONLY

- MOTOR MODEL:
9RDD□-60F(-T) (GENERAL FAN)

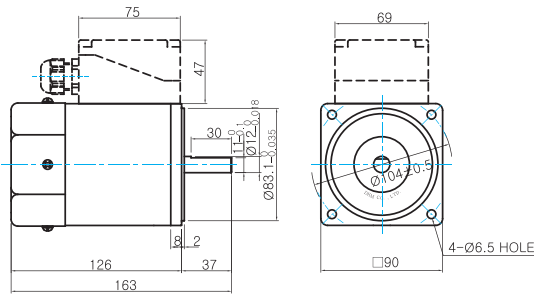


MOTOR OUTPUT SHAFT

MODEL	SPEC
D-CUT TYPE	
9RDD□-60F	
KEY TYPE	
9RDK□-60F	



INTER-DECIMAL GEARHEAD


- MODEL: 9XD10M□

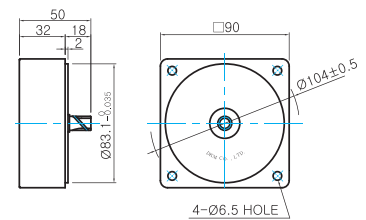

GEARED MOTOR


P TYPE GEARHEAD

- MOTOR MODEL:
9RDG□-60FP (GENERAL FAN)

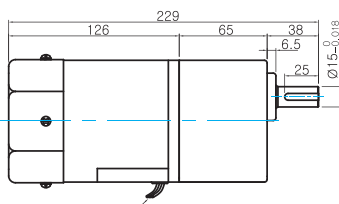


LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL:
9PBK□BH




- GEARHEAD MODEL:
9PFK□BH

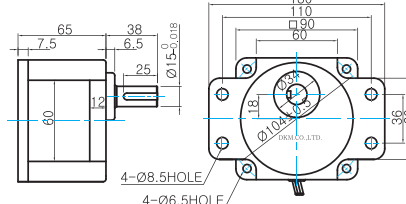

GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	
9PBK□BH	
9PFK□BH	

KEY SPEC




H TYPE GEARHEAD

- MOTOR MODEL:
9RDG□-60FH (GENERAL FAN)

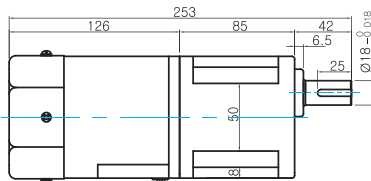


LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL:
9HBK□BH




- GEARHEAD MODEL:
9HFK□BH

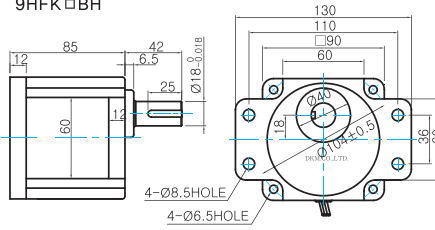

GEARHEAD OUTPUT SHAFT


MODEL	SPEC
KEY TYPE	
9HBK□BH	
9HFK□BH	

KEY SPEC




W TYPE GEARHEAD

- MOTOR MODEL:
9RDG□-60FW (GENERAL FAN)

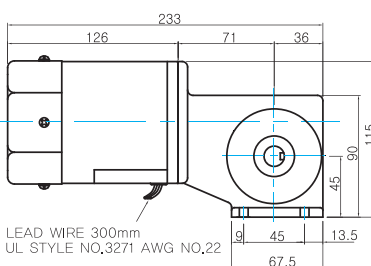


LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

- GEARHEAD MODEL:
9WD□BL/BR/BRL

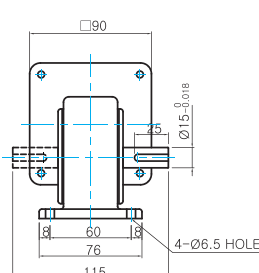


KEY SPEC


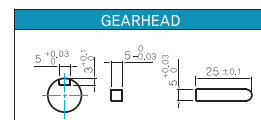


WH TYPE GEARHEAD


● MOTOR MODEL:
9RDG□-90FWH (GENERAL FAN)

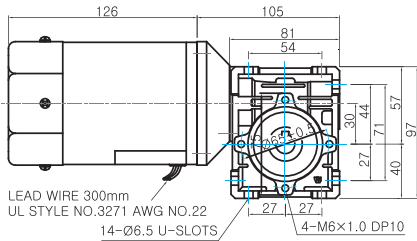

● GEARHEAD MODEL:
9WHD□




INPUT



OUTPUT



● SHAFT(Unidirectional, Bi-directional)

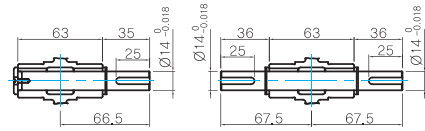


WEIGHT

PART	WEIGHT(Kg)
MOTOR	3,0
9PB(F)K2BH ~ 9PB(F)K18BH	1,3
9PB(F)K20BH ~ 9PB(F)K180BH	1,4
9HB(F)K3BH ~ 9HB(F)K9BH	1,45
9HB(F)K12.5BH ~ 9HB(F)K18BH	1,5
9HB(F)K20BH ~ 9HB(F)K60BH	1,7
9HB(F)K75BH ~ 9HB(F)K180BH	1,8
9WD□BL/BR/BRL	1,0
9WHD□	1,13
9XD10M□	0,5

● FLANGE




● KEY SPEC

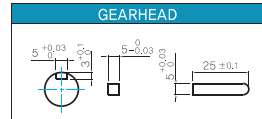

* The output flange and shafts are sold separately.




Motor Images

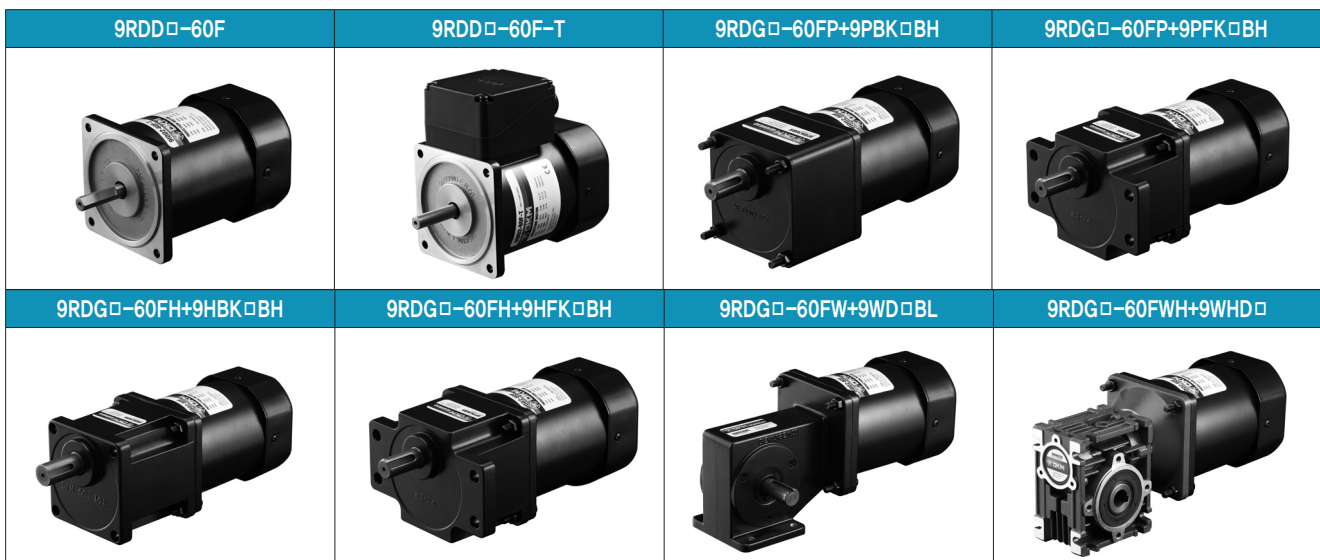

B AC Motors

Reversible Motor 60W(□90mm)

Connection Diagrams

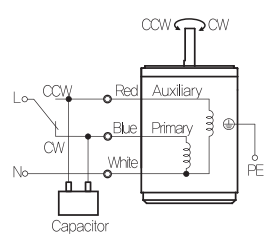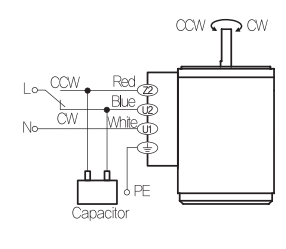Lead Wire Type	Terminal Box Type						
							
	<table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <thead> <tr style="background-color: #0070C0; color: white;"> <th style="padding: 2px;">Code</th> <th style="padding: 2px;">Contact Capacity</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px;">SW</td> <td style="padding: 2px;">AC125V 5A min. or AC250V 5A min. (Inductive load)</td> </tr> <tr> <td style="text-align: center; padding: 2px;">Ro, Co</td> <td style="padding: 2px;">Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)</td> </tr> </tbody> </table> <p style="font-size: small; margin-top: 5px;">* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5~200Ω Co=0.1~0.2μF, 200W (400W)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.