


Dimensions

MOTOR ONLY

- MOTOR MODEL: 6IDD□-6(-T) (NO FAN)

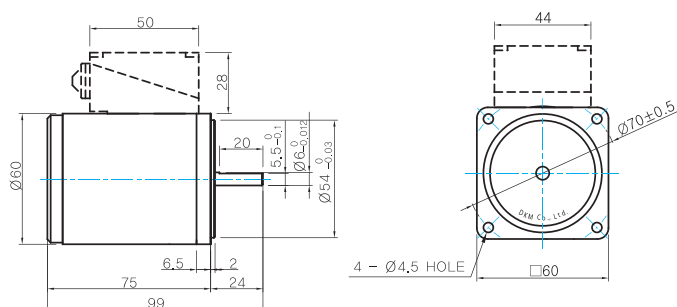

- MOTOR OUTPUT SHAFT


MODEL	SPEC
D-CUT TYPE	

GEARED MOTOR

G TYPE GEARHEAD

- MOTOR MODEL: 6IDG□-6G (NO FAN)

- GEARHEAD MODEL: 6GBD□MH

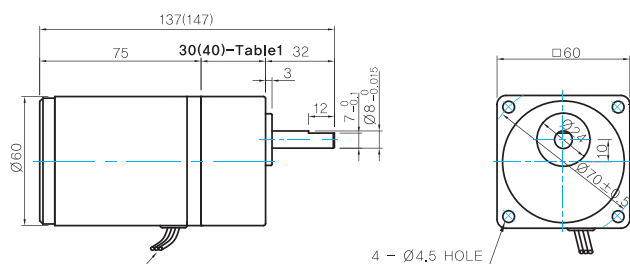

LEAD WIRE 300mm
UL STYLE NO.3271 AWG NO.22

WEIGHT

- GEARHEAD OUTPUT SHAFT


MODEL	SPEC
D-CUT TYPE	

PART		WEIGHT(Kg)
MOTOR		0,7
GEAR HEAD	6GBD3MH ~ 6GBD18MH	0,3
	6GBD20MH ~ 6GBD40MH	0,32
	6GBD50MH ~ 6GBD250MH	0,34

- 30(40)-Table1

SIZE(mm)	GEAR RATIO
30	6GBD3MH - 6GBD18MH
40	6GBD20MH - 6GBD250MH

Connection Diagrams

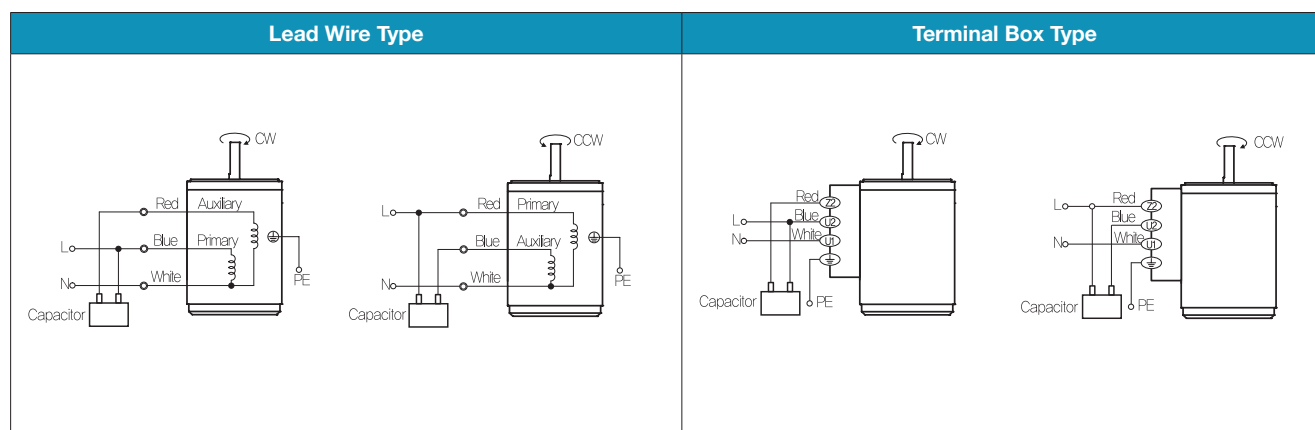

- The direction of motor rotation is as viewed from the shaft end of the motor.
- CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Change the direction of single phase motor rotation only after bringing the motor to a stop. If an attempt is made to change the direction of rotation while the motor is rotating, the motor may ignore the reversing command or change its direction after some delay.